


subject to technical alterations

**type:** K  
**range:** 0 - 10 mm  
**range of indication:** 0 - 10,5 mm  
**digital step:** 0,005  
**scale interval:** -  
**measuring force:** 1,2 - 1,6 N  
**weight:** 260 g

acceptable deviations  
VDI/VDE/DGQ 2618 Bl. 12.1/13.1)  
**max. permissible errors "G":** 0,03 mm  
**repeatability "r":** 0,01 mm  
**reference temperature:** 20° C  
**operation temperature:** 10° C - 30° C  
**storage temperature:** -10° C - 50° C

**scale:** 1:1  
**drawing-nr.:** DAB-K110-K-e  
**date of issue:** 21.01.2020  
**name:** B. Schmidt  
**revision status:**  
**revision date:**

interface as accessories available:

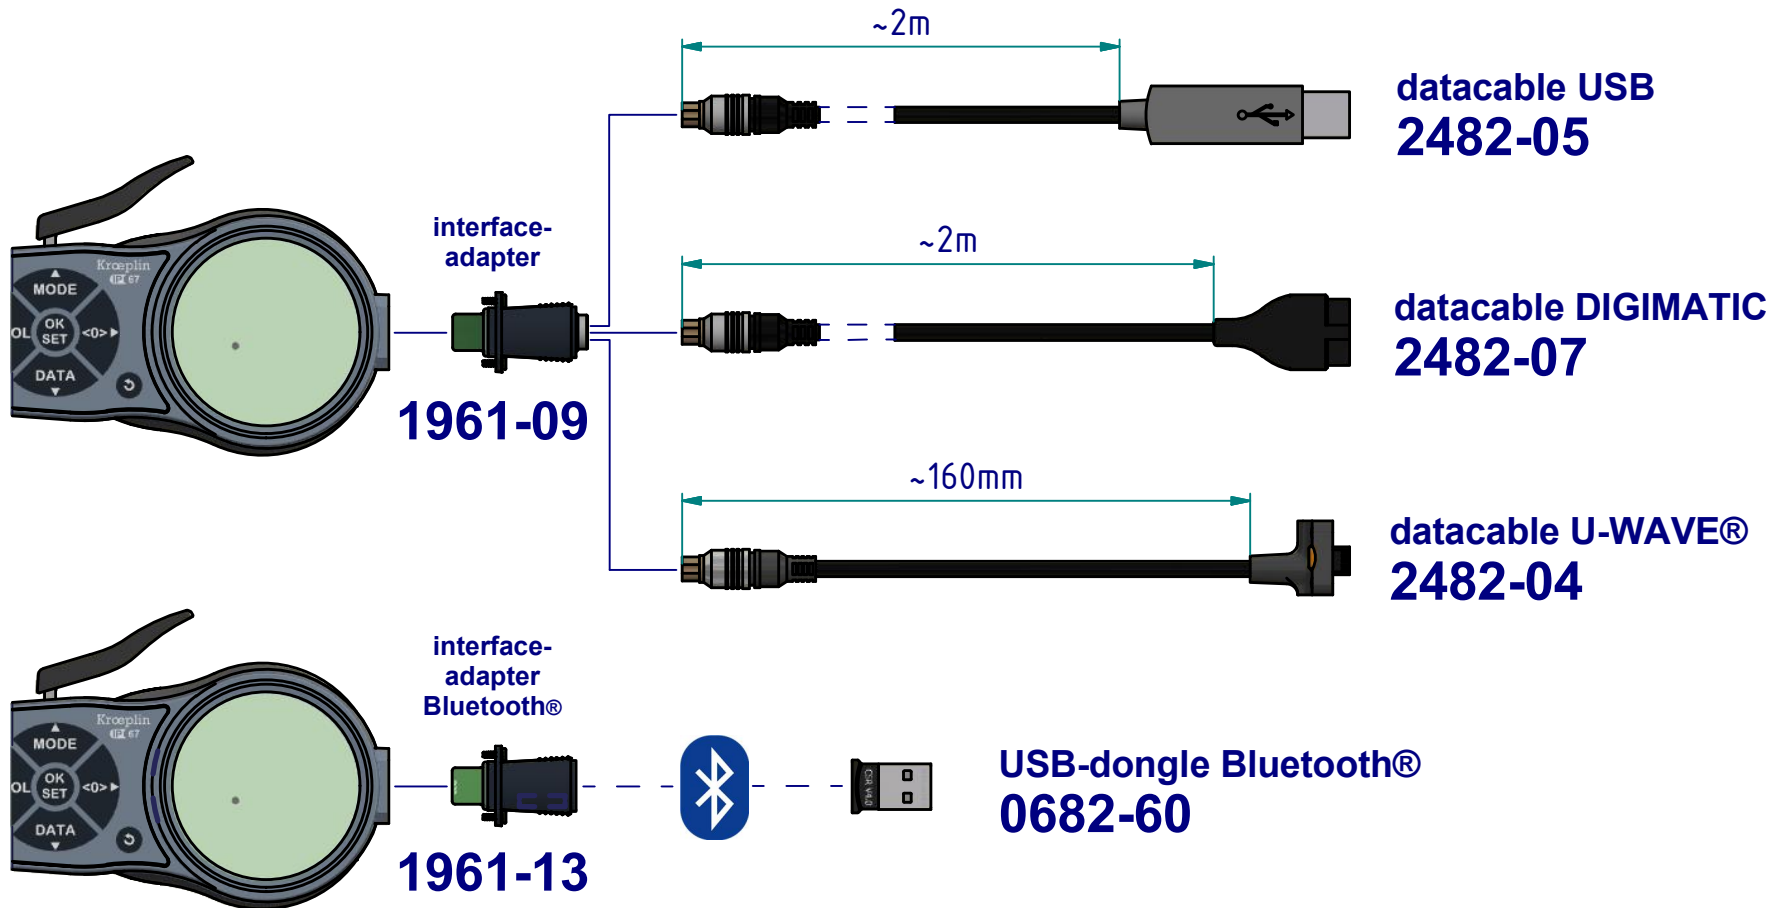

subject to technical alterations

drawing-nr.:	DAB-K110-K-e
date of issue:	21.01.2020
name:	B. Schmidt
revision status:	
revision date:	